



Important - Read first

To ensure that the Unit is used safely and responsibly, it is recommended that this manual is read by everyone using it and that the recommendations contained within are followed at all times.

Plant use: Please ensure that each area is used for its intended purpose only, as indicated in layout plans!

If there is anything you do not understand, DO NOT use this equipment, please contact Advanté Limited on 01268 280500 for advice.

INDEX

Introduction	2	Telemetric System	10
Thank you for choosing Oasis Vision Solar Welfare		Telemetric System	
About this Manual	2	Curfew	
Site Selection and Preparation (Safe Operation)	3	Generator	10 - 11
Location		Overview	
Condition and Suitability		Safety	
Preparation		Precautions	
Lifting and Positioning (Safe Operation)	3 - 4	Housekeeping	
Safety		Earth Bonding	
Lifting Points		Daily Checks	
Solar Power Panels		How to Check Oil and Top-up (24ft only)	
Lifting Equipment		Auto Top-up Oil Level	
Attaching the Lifting Equipment		Day-to-Day Maintenance Schedule	12
Lifting		Daily Checks to Include	
Manoeuvring		LPG Management	12 - 13
Lowering		Cylinders	
Surface Condition and Levelling Legs		LPG Levels	
LPG Safety (Safe Operation)	5	Gas Bottle Connection	
LPG Properties and Hazards		Changing a Cylinder	
General Safety		Gas Valves	
Client Responsibilities (Safe Operation)	5	Set Up	
Leak Detection		Automatic Changeover Valve	
Guidance on Gas Cylinders		Checking for Leaks	
Security	6	Specification	14
Locks		Unit Size	
Water Management	6	Height	
Washing Water		Weight	
Hand Wash Basins		Water Capacity	
Fire Safety	6	LPG	
Fire Safety		Rate of Energy Conversion	
WC	7	Generator	
WC		Water Heater	
Light Indicator Panel		Additional Equipment	
Toilet Emptying	7	Toilets	
Frost Precautions	7	Client Responsibilities	15
Heater		COSSH Sheets	
Fuel		Propane Gas	16 - 17
Oasis Heating System (Using LPG)	8	Toilet Additive	18 - 19
Overview		Anti Freeze	20 - 21
Resetting the Oasis Heating System	8	Lead Acid Battery	22 - 23
3030 Alde Control Panel		Engine Oil	24 - 25
Lighting System	9	Soap Bars	26 - 27
Electrical System	9 - 10		
Overview			
Loss of 230V Power			
230V			
Solar Power			
Generator			
12V DC Power			
Inverter			

INTRODUCTION

Thank you for choosing Oasis Vision Solar Welfare

Advanté Limited is a leading supplier of high quality, sustainable, instant start welfare units. We work closely with our clients to create positive welfare environments for people working in construction, to reduce carbon on construction sites and have a positive impact on the community.

Plant use: Please ensure that each area is used for its intended purpose only, as indicated in layout plans!

The Oasis Vision Solar welfare range offers an extensive range of self-contained welfare, available in different sizes and layouts.

Why choose Oasis Vision Solar welfare for your site?

Health and safety

- Very low noise, mainly silent running
- Hot & cold controlled running water
- Full forearm hand wash basins

Sustainability

- Electrical power delivered on average 95.2% from solar/renewable energy all year
- Low carbon emissions
- Solar hybrid technology
- Reduced running costs

Staff wellbeing

- Positive work environment
- 2+1 toilet facilities

Good neighbours

- Noise reduction
- Unit curfew system
- Professional appearance
- Reliable welfare, less disruption

Thank you for choosing Oasis Welfare for your site.

As always, we are very keen to hear your feedback to support our future product and service development.

ABOUT THIS MANUAL

The information and instructions included in this manual are provided to help you get the best possible service from your Oasis Vision Solar welfare setup.

Certain information in this manual is governed by law and is subject to change without prior notice. Great care has been taken to ensure that the information is correct at the time of publication. However it is the user's sole responsibility to ensure that they fully comply with all legal requirements.

Regular inspection, servicing and periodic maintenance will ensure trouble free operation.

Advanté Limited will not accept liability for any inaccuracy or incorrectly stated legal requirements. Advanté Limited maintain a policy of continued improvement and reserve the right to change specifications without prior notice.

Location

It is the hirer's responsibility to carry out a full risk assessment before siting and positioning the Oasis Vision Solar welfare unit.

The risk assessment should establish a safe zone including (but not limited to), ground, side and overhead hazards such as power supply and communication cables, lighting systems, drainage systems and other services.

Access to and passage around the Oasis Vision Solar welfare unit must also be considered.

Where delivery or collection services are required for the units' upkeep, you must ensure ease of safe access both for personnel and vehicles.

This procedure must be performed within your Contract Safety Plan.

If permission is required with regard to the positioning of the Oasis Vision Solar welfare unit, it is the hirer's responsibility to obtain this before delivery and use.

Conditions and Suitability


Ensure that the ground on which the unit is being sited is smooth, level and capable of with-standing the units' weight plus its load.

Ensure that the ground is suitable for both positioning and accessing the unit as any subsidence or poor ground conditions will affect its safe use and operation.

Preparation

Once a suitable site has been chosen and approved, the area should be made ready. Clear the ground area, where the Oasis Vision Solar welfare unit is to be used, of all obstructions. Decide in advance which direction the Oasis Vision Solar welfare unit should be facing.

Whether the Oasis Vision Solar welfare unit is being delivered or collected, use suitable barriers and tape to create a safe zone which will keep bystanders and unauthorised persons away during the loading/unloading process.

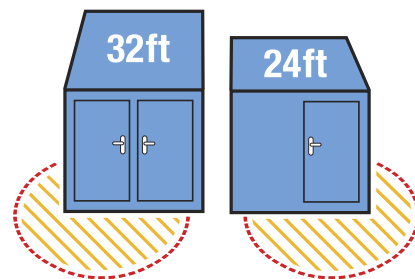

Safety

The Oasis Vision Solar welfare unit may only be lifted and positioned by suitably trained personnel, using correctly rated and certified lifting equipment.

NEVER drag or pull the unit across the ground, it MUST always be lifted.

Switch the generator OFF and close all gas valves.

Secure any LPG bottles by chain.

Switch OFF the water heater.

Lower all toilet seats then close all internal doors. Close all windows and window shutters and lock all external doors.


Damage caused by incorrect lifting practices will be charged for and the unit will remain on hire until all repairs are completed.

Lifting Points

The Oasis Vision Solar welfare unit must ONLY be lifted via the designated lifting points. There are two options; both require the use of suitable chains.

You may use a set of four leg chain slings attached to the lifting points found in each roof corner. Alternatively it can be lifted using suitable chains connected to the four low level lifting eyes located along the bottom rail. (When lifting from the low level lifting eyes, long chains can be used as the roof is strengthened to take the load).

Whichever lifting point is selected, ALL four points must be used during a lift.

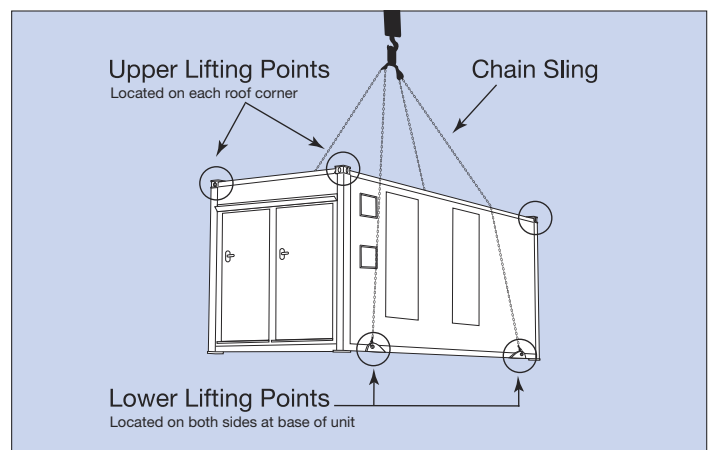

Solar Power Panels

The Oasis Vision Solar welfare units have the top of the unit covered in 6 solar panels, fitted to the roof as part of the Solar Hybrid power system. It's of the utmost importance that the panels are protected from damage during lifting operations.

DO NOT allow the chain slings to be lowered or dropped onto the solar panels. Any damage will be the responsibility of the hirer and is chargeable.


Note: Damage of any level (minor or major) to a panel cannot be repaired and will be charged for as a full replacement cost.

Lifting Equipment

You will require a lifting device (crane) and suitable lifting chains.

When lifting via the four roof corners, you will need a four leg chain sling fitted with hooks and safety catches. Note that most chain slings safe working load are rated at 90 degrees and the safe working load usually decreases, depending upon the angle the chain is used at. When lifting via the low level lifting eyes you will need chain slings with suitable spreader beams. Always check and obtain official confirmation from the lifting equipment supplier that it is both suitable in safe working load and chain/beam length.

Attaching the Lifting Equipment



With the lifting chains correctly attached to the lifting equipment, attach each hook to a lifting point, one in each corner or each low level lifting eye. Once attached, ensure that each hook's gate is closed.

Prior to lifting, it may be necessary to shorten the chains at one end of the unit to balance it when raised. Determine the load's weight and centre of gravity as accurately as possible.

Attach tag lines to the base of the unit to control rotation and to assist in manoeuvring.

Lifting

Raise the chains until taut and check that the hooks are correctly positioned with gate closed and that the chains are not twisted. If a fault is found, lower the chains and reattach correctly.

Lift the unit just off of the ground and check that it is balanced and stable. Internal fittings are not evenly distributed in the unit therefore you may have to alter chain lengths to compensate.

Only once you are fully satisfied that everything is correctly and safely set up, should you continue with the lift.

DO NOT ALLOW ANYONE UNDER THE RAISED LOAD AT ANY TIME OR FOR ANY REASON.


Manoeuvring

Use suitable tag lines to help control the movement of the unit and always keep constant communication with the crane operator. Move slowly and smoothly to ensure full control of the units' whereabouts.

Lowering

Lower the unit to its required resting place using great care. Ensure that the ground area is level and stable. Caution: as the weight is taken off of the chains, ensure that they do not come into contact with the solar panels.

Surface Condition and Levelling Legs

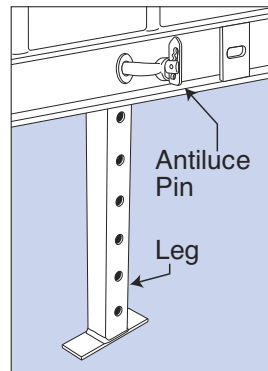

Where the surface is either soft or susceptible to damage from the units' legs, place a foot pad (available for hire) between the ground and the leg.

Maximum extension on any leg should be 500mm.

If required, set the levelling legs as necessary prior to fully lowering the unit. Release the antiluce

catch then support the leg as you extract the retaining pin. Lower the leg to the length required, then replace the pin to the nearest location hole ensuring its loop fits fully over the antiluce catch. Finally lock the antiluce catch. DO NOT use the levelling legs to increase the unit's height.

LPG Properties and Hazards

- LPG is normally stored as a liquid under pressure.
- Leakage, especially of liquid, may release large volumes of flammable gasses.
- A very small proportion of LPG released into air can give rise to an explosive mixture.
- LPG liquid, by its rapid vapourisation and consequent lowering of the temperature, can cause severe frost burns if it comes into contact with the skin.
- LPG vapour is heavier than air and may flow along the ground or through drains and be ignited at a considerable distance from the source of the leakage. In still air, any vapour will disperse slowly.
- LPG is odourised before distribution so that its distinctive smell can give warning of gas escape.
- Any sign of damage to the LPG system **MUST** be reported immediately.
- Smoking should be prohibited.

LEGAL NOTICE

There are regulations and specific legislation which govern the transportation, storage and use of gas cylinders.

It is the user's responsibility to ensure that they are aware of all legal requirements.

General Safety

DO NOT SMOKE or use naked lights.



Wear the correct Personal Protective Equipment when handling LPG Cylinders.



Wear gloves when handling LPG cylinders and regulators.

Steel toecap boots must be worn when manoeuvring LPG cylinders.

Do not wear loose jewellery or clothing that may get in the way or become trapped in the equipment. Tie back long hair.

Inform everyone in the work area of what you are doing. Ensure adequate ventilation when using LPG cylinders.

LPG cylinders are heavy, never attempt to lift one on your own, always get help.

Always switch OFF LPG equipment and isolate it from the gas supply if not required.

Carefully inspect the LPG cylinders and equipment before use, if there is any doubt about their condition, DO NOT USE THEM.

It is important that you check all equipment for leaks once connected.

SMOKING when near to LPG cylinders and LPG equipment MUST NOT BE ALLOWED UNDER ANY CIRCUMSTANCES.

MEDICAL WARNING

Breathing high concentrations of LPG will cause drowsiness, loss of consciousness or possibly death.

If you or your clothing become contaminated with LPG, change your clothing immediately and wash off with soap and fresh water.

CLIENT RESPONSIBILITIES

SAFE OPERATION

Leak Detection

- Cylinders should be inspected regularly for leakage.
- Awareness of gas shut-off valve location.
- Never attempt to find a leak by means of a naked flame.
 1. Sense of smell.
 2. The sound of escaping gas.
 3. Leaks may be confirmed by using a leak detection fluid over the suspected leak source.
- In the event of a suspected leak.
 1. The cylinder valve should be closed.

2. Open all doors and windows.

3. Contact Advanté on 01268 280500 between 8.00am and 5.00pm for an Advanté qualified Gas Safe Engineer to attend.


Guidance on Gas Cylinders

- When you're changing cylinders, make sure all cylinder valves or gas taps are turned off before disconnecting. (Please see section on changing gas bottles).
- Don't over-tighten joints.

Please refer to Maintenance schedule on page 12

SECURITY


Locks

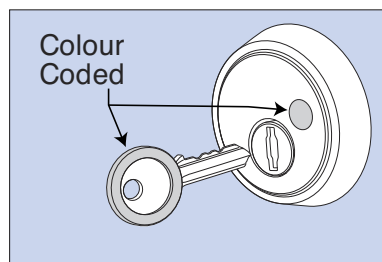

External doors to the toilets and generator/ LPG store are fitted with five lever dead locks which are key operated from outside but lever operated from inside. No two locks use the same key and therefore

to assist the user, each lock and matching key are colour coded.

Each lock operates a total of 9 bolts. There are 3 bolts to the main lock point, 2 to the upper edge, 2 to the lower edge and a further single bolt to the top and bottom of the door.

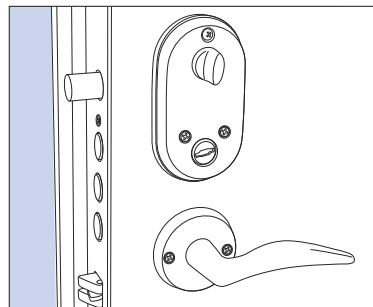

In addition, the hinge side of each door is fitted with security pins which engage with the door frame when closed.

To lock a door, firstly close the door fully. Next insert the correct key


and turn one full revolution. Turn the key a second full revolution to 'dead lock' the door. Unlocking is simply a reverse of locking.

NB: Please be aware there are some variations in door locks.

WATER MANAGEMENT

Washing Water

The Oasis Vision Solar welfare unit has a water management system in place to minimise water use and therefore water wastage. The water used in this system is not suitable for drinking. All waste water produced is delivered to an on-board black water storage tank.

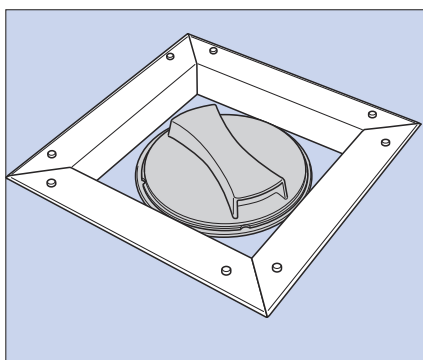

The capped filling point for the tank is located within a cutout in the single toilet area. The cap can be removed by turning anti-clockwise.

Fill the tank to approximately

100mm from the top using a clean hose from a fresh mains water supply. DO NOT allow the hose to be left unattended in case the hose becomes free or you exceed the tank capacity.

Note: there is an overflow fitted to the tank which discharges under the unit but if your supply water pressure delivers more water than the overflow can handle, the kitchen will flood.

Hand Wash Basins

To help conserve water and avoid flooding, the taps are the push top type. To obtain water, press and hold the taps' push top, maximum flow is achieved by pressing the push top by approximately 1/2 down.


When running the hot tap, take care, as the tap body will become as hot as the water.

FIRE SAFETY


Fire Safety

A dry powder fire extinguisher is supplied with the Oasis Vision Solar welfare unit. It will be found in the larger toilet area through the right hand door. If it is used, missing or faulty, contact Advanté for an immediate replacement.

It is the user's responsibility to organise a fire drill in case a fire should occur. All users must familiarise themselves with the position of fire fighting equipment and its correct use.

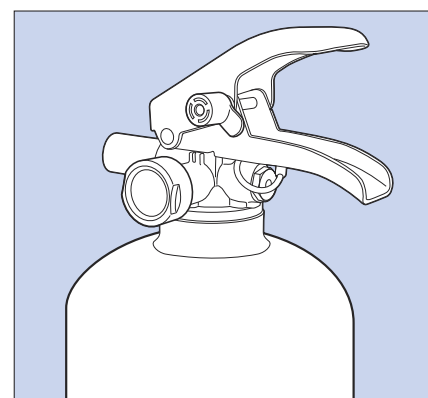

WC

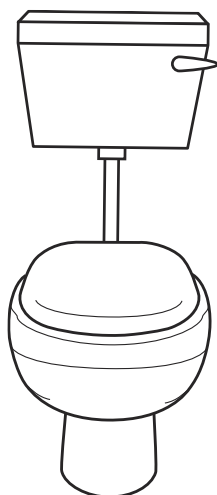


WC


The WCs have traditional flush type cisterns.

Light Indicator Panel

This is situated on the wall by the entrance door in the larger toilet area.

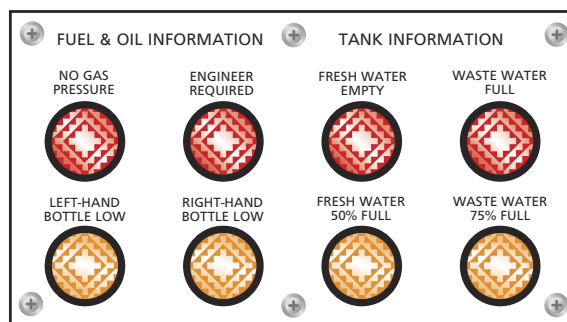

TOILET EMPTYING

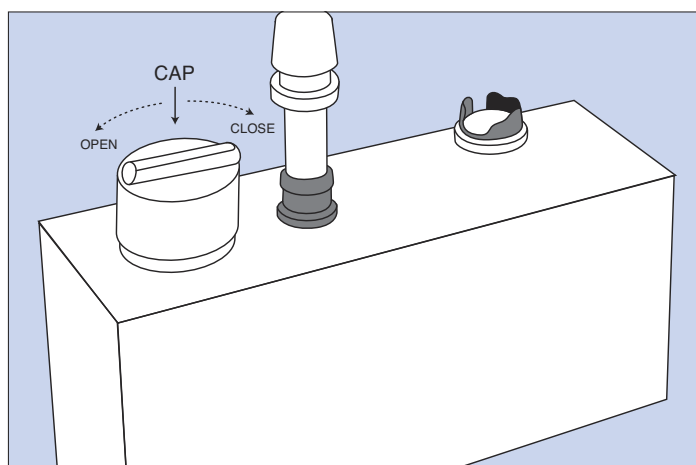

All WCs and wash hand basins operate in exactly the same way. The black water tank emptying access port is located at the end of the unit. The port is covered by a cap which simply unscrews.

Emptying of the waste tank must ONLY be carried out by a licenced specialist company with the correct equipment. You can arrange for your own emptying or have Advanté arrange it for you.

NOTE: When the waste storage tank becomes full, the flushing and washing water systems are shut down to prevent the tank overflowing.

For further advice contact Advanté on 01268 280500.

FROST PRECAUTIONS

Heater

When the temperature is likely to drop, it is important to protect the units' water systems from damage caused by frost and freezing conditions.

The Oasis Vision Solar welfare unit is fitted with a sealed, wet heating system. The system is protected to a degree with a 50/50 mix of water and anti-freeze. However, during cold spells it is important that the heating remains on 24h a day to help prevent the fresh water system from freezing. The heating need only be set to 5°C to keep the room temperatures high enough to prevent freezing.

Fuel

The Oasis Vision Solar welfare unit is designed to be self-managed, that is to say, little intervention from the hirer. However, it cannot operate without a supply of LPG to run the generator and heater.

If the unit is to remain unused for a period (Christmas or Easter shut down for example) you must make sure that there is sufficient LPG in the connected cylinder.

It is important that the unit always has a constant supply of fuel at all times. Damage resulting from lack of fuel will be chargeable.

A key part of this units operation is solar energy so unit must have a clear view of the sky with no shadows passing over unit from south to maximise solar gain.

Please see 'Client Responsibilities' section of this manual for hirers responsibilities (p.15).

OASIS HEATING SYSTEM (USING LPG)

Overview

The heater is housed within the single toilet area and is self running. This heater supplies both hot water for washing and hot water to all the radiators. A simple sealed system, filled with antifreeze, removes the risk of damage through frost and freezing conditions.

The room thermostat and heater control panel are situated within the single toilet area. The heater is controlled via the control panel and the next set of instructions will guide you through its settings. This system operates on both LPG and Electricity.

Note: never turn off isolation valves on radiators in system, only adjust thermostatic valves to required temperature.

RESETTING THE OASIS HEATING SYSTEM

1 Resetting The System

Press the reset button.

2 Start The Heater

As '1' or if it says OFF, press + ON.

3 Switching The Heater OFF

Press either arrow button until 'ON' flashes. Press the - OFF button and OFF will flash indicating that it has been selected.

4 Select The Room Temperature

Press the Indoor icon on main menu button until the 'Thermostat' symbol appears. Press the + ON button to increase and the - OFF button to decrease room temperature.

Selected temperature is shown to the left side of the display. We recommend 20 degrees.

5 Warm Water

The water will automatically be heated to 50 degrees.

6 Heating With LPG Gas

Used to activate (fire up) the water heater.

Press either arrow button until 'flame' icon flashes and the large wording OFF appears on the right of the panel.

Press the + ON button and the large wording will change to ON. Press the - OFF button to switch this option OFF.

7 Load Indicator


You can limit the amps being used by the heater to protect the generator and other circuits.

Press either arrow button until 'amp' icon flashes and the large wording OFF appears on the right of the panel.


Press the -OFF button and the large wording will change to a number from 5 to 17. Press the +ON or -OFF button to select the required rating.

3030 Control Panel

Resetting the Oasis Heating System with Touch Screen Controls

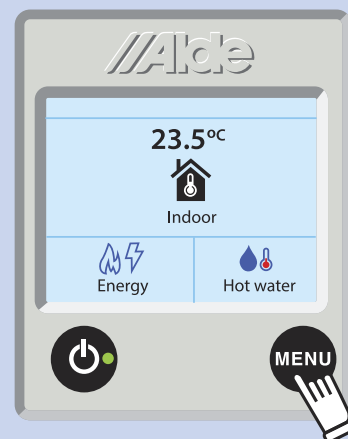

1. Press *MENU* button to access the Main Menu from the Standby Screen.

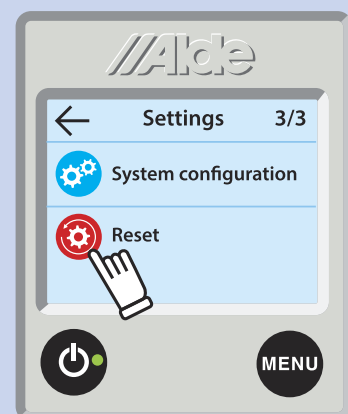

2. Scroll through the Menu until you get to screen '3/3' and press *Reset*.

This will restore the system to 22°C hot water and gas heating.

To save fuel and run system efficiently, before leaving in the evening set heating controls to 10°C. (Heating remains on at night under battery power only, low setting means less gas used).

LIGHTING SYSTEM

The Oasis Vision Solar welfare unit's lighting system utilises low energy LED light units which offer good lighting levels with minimal power consumption.

To control and therefore reduce the amount of power consumed by the lighting system, each room (excluding the separate W/C) is fitted with an automatic movement sensor which switches the light on for a set period of time, when movement is detected.

ELECTRICAL SYSTEM

Overview

The Oasis Vision Solar welfare units' electrical system is designed to consume the minimum of fuel whilst maintaining a high level of service and therefore reducing your Carbon foot print.

To help achieve this, all power required to operate the various services and equipment is supplied from stored power. The level of stored power is maintained automatically by a complex management system that utilises both generated power and solar power.

Using a stored power system enables all 230V power to be constant and free from power surges and drops.

Loss of 230 Volt Power

There are two systems in place which will protect the unit from overloads.

The Oasis Vision Solar welfare unit is designed to allow an additional 500W of power consumption above the maximum required to run all supplied/fitted services at any one time. However, if you exceed the 500W, the system will shut down.

The overload protection is necessary to protect the system against damage from overloading and to ensure that the Oasis Vision Solar welfare unit remains environmentally friendly.

A loss of power may also occur if the generator has failed to start when required. This is usually caused by a lack of LPG and can be remedied easily by attaching a replacement cylinder. If this occurs, please refer to the sections in this manual which deal with LPG cylinders and with restarting the generator.

230V

The 230V systems' main consumer unit with RCCB is located in the generator storage bay.

The RCCB protects the 230V supply circuits.

CAUTION

You **MUST NOT** place or store any items on the roof of the Oasis Vision Solar welfare unit as damage to the solar panels may occur.

Note: Damage of any level (minor or major) to a panel cannot be repaired and will be charged for as a full replacement cost.

Solar Power


Your unit is fitted with a 6 panel solar array which is active all the time (even at night street lighting will energise array), the power from this array is the principal source of electric power to the unit for 95% of its needs and is supplemented at times of low solar gain by a generator. To get best performance from solar array the unit needs to have a southerly aspect with good 180-degree visibility of the sky through the day.

It is important that the panel surface is protected against any form of damage and that it is kept clean. Build-up of dust and dirt or a layer of snow can reduce or even stop the panels' performance.

The overall power systems output is monitored via on board power system and information from that is transmitted by onboard telemetry to Advanté and is available upon request from our service or sales teams.

CAUTION

The units Solar array is cable of producing power 24 hours a day so system is only to accessed by Advanté trained Engineers if access is needed for any purpose. so even if your unit is curfewed the harvesting of solar energy is still taking place with power system.

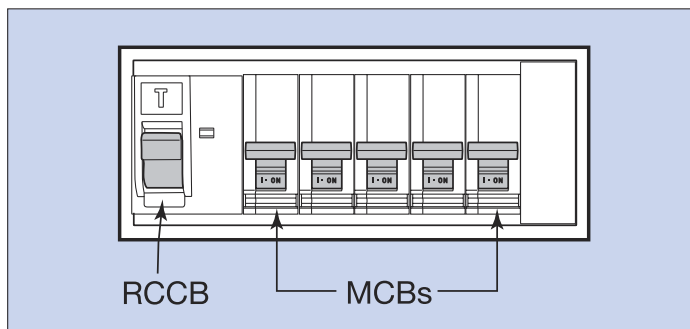

ELECTRICAL SYSTEM (CONTINUED)

Generator

The power supplied by the generator is protected by an additional RCCD unit which is fitted to the outside of the generator sound proof booth.

12V DC Power

The DC distribution board, which is also located in the generator storage bay, supplies all the DC power to the Oasis Vision Solar welfare units' operating systems, pumps and monitoring systems.

The 12V DC power supply can be isolated by turning the DC isolator switch to OFF. The switch has a simple rotary action.

Inverter

The inverter transforms DC voltage to 230V and is supplied from the stored power system. When both 230V and 12V systems are isolated, the ECU inverter is still live and needs specialist knowledge to be isolated, contact Advanté Service team if you need to isolate.

WARNING

When both 230v and 12v systems are isolated the Inverter is still live.

DO NOT attempt to carry out any work on the electrical system unless you are trained and authorised to do so.

TELEMETRIC SYSTEM

Telemetric System

Each Oasis Vision Solar welfare unit is visible from our control room. Wherever the unit is sited, information is exchanged between unit and control room. We are able to view every aspect of the unit, and set alerts for site if required.

Curfew

The operating hours of the unit are controlled by a curfew system. The curfew can be set to your specific site requirement and is both monitored and reset, if required, by our Service Team. The use of a curfew saves fuel and reduces impact on both the community and environment.

GENERATOR

Overview

The generator runs automatically and must not be started manually without guidance from the Advanté Service team.

The generator is housed within a soundproof booth to minimise noise pollution and to help manage the engines' operating temperature. The generator is fuelled by LPG (Liquefied Petroleum Gas) and managed automatically so that it is only operated when required by the system.

Safety

Before carrying out any checks or maintenance, you **MUST** read and fully understand these instructions. Failure to follow the information within this section may cause damage to the generator and put you at risk of serious injury.

Make sure you understand how to stop the generator in an emergency. **DO NOT** attempt any procedure until you have disabled the generator's auto start system to prevent it being started remotely. Make sure everyone is aware of what you are doing.

Precautions

The generator must not be operated when the acoustic side panel is removed and all guards must be in place.

Any covers such as electrical junctions must be in place. Other than when checking and replenishing engine oil levels, disconnect the engine's negative battery connection.

Set the 12V breaker to OFF before carrying out any maintenance/pre-start checks.

DO NOT SMOKE

The generator bay is designated a NO SMOKING AREA.

See LPG section for additional warnings and precautions. **DO NOT** touch any part of the engine and generator when operating or immediately after it has been operating. The engine and generator become very hot during use, allow to cool sufficiently before touching any part.

GENERATOR (CONTINUED)

Housekeeping

Clean up any oil spillage immediately to prevent accidents and to maintain a clean work environment. All vents and exhaust outlets must be free from obstruction to ensure that there is a sufficient flow of air for running and cooling the engine. Make sure that fumes from the exhaust cannot be drawn back into the generator bay.

Earth Bonding

The generators windings are earth bonded unless specifically stated otherwise. The NEUTRAL and EARTH terminals of the output circuits are electrically bonded/connected within the generator. However, if you wish to have the earthing point connected to a suitable ground stake, please contact Advanté on 01268 280500 for advice.


Daily Checks

It is important for the unit to maintain fuel levels at all times. Damage resulting from lack of fuel will be chargeable.

Check gas cylinders daily to ensure sufficient fuel, see 'LPG SAFETY' (page16).

How to Check Oil and Top-up (24ft only)

To top up your oil you will need to disable the generator by popping out the chrome 12V trip switch. Remove the generator front panel, perform oil level check (See diagram below) and pop the 12V trip switch back in.

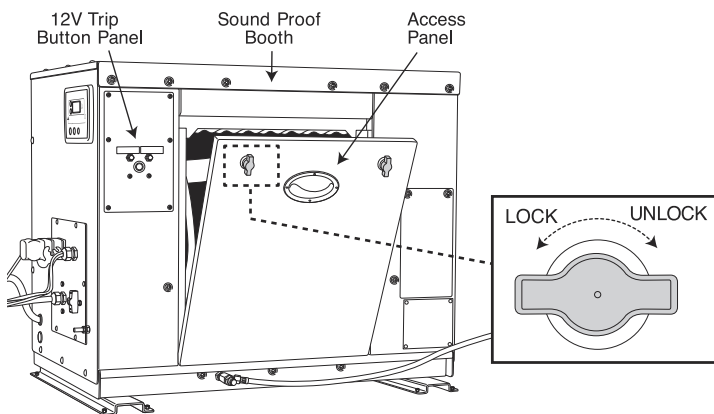


Oil Level Check

Check the engine oil level with the engine stopped and in a level position.

1. Remove the oil filler cap/dipstick and wipe it clean.
2. Insert the oil filler cap/dipstick into the oil filler neck as shown, but do not screw it in, then remove it to check the oil level.
3. If the oil level is near or below the lower limit mark on the dipstick, fill with the recommended oil (Semi Synthetic 10W-40) to the upper limit mark (bottom edge of the oil fill hole). Do not overfill.
4. Reinstall the oil filler cap/dipstick.

Note: Running the engine with a low oil level can cause engine damage.

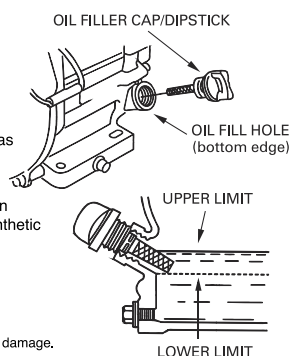

WARNING


The generator in this unit is an auto start generator and should be isolated safely prior to topping up the oil.

If your generator is fitted with an Auto Top-Up Oil System, the oil reservoir can be found inside the generator housing on the right hand side. Remove silver screw cap and top up as required.

Auto Top-up Oil level

If the generator is fitted with an Auto Top-Up Oil system it will monitor the engines oil level and top it up as required. Though this helps safeguard against engine damage due to lack of lubrication, the oil level indicator will require checking on a daily basis.

The oil level must be within the green band. If the level is low contact the Service Team at Advanté on 01268 280500 who will advise you how to top it up safely.

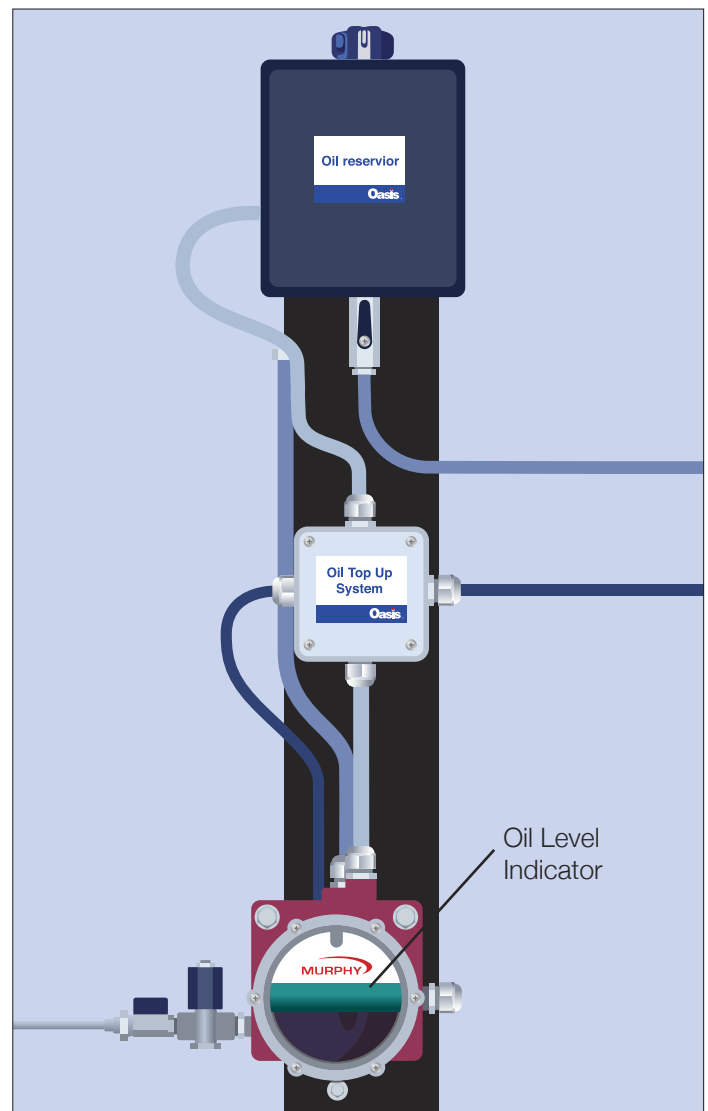

DAY-TO-DAY HIRER MAINTENANCE SCHEDULE



DAILY CHECKS NEED TO BE CARRIED OUT FOR THE SAFE, EFFICIENT OPERATION OF YOUR UNIT.



Daily checks to include:

- Check generator oil.
- Check LPG gas changeover valve indicator - Is a cylinder empty and needs replacing?
- Visual check of LPG pipe work, acting accordingly if LPG smell detected.
- Check unit information panel - Are there any alerts you need to action?
- Check unit generally for operation of doors and windows.
- User systems (water, electricity and waste) are all functioning correctly

LPG MANAGEMENT

Cylinders

Advanté supply two full 47kg Calor Gas Propane cylinders with the Oasis Vision Solar welfare unit, charged at the current rate. Both are stored in the LPG locker.

Advanté ONLY supply Calor cylinders and you must make sure that only Calor cylinders are returned at the end of the hire. Charges will be made for replacing missing Calor cylinders, other brands will not be accepted.


LPG Levels

The locker is also fitted with a special weighing system that monitors the content of the cylinder (32ft only). Information on LPG levels is gathered by our telemetry system.

The locker has enough space to store an additional two cylinders to ensure continuation of supply


Spare LPG cylinders MUST be stored with valves closed and with plastic plug fitted. You can arrange your own replacements of empty cylinders or have Advanté organise the exchange for you.

47kg
Cylinder →

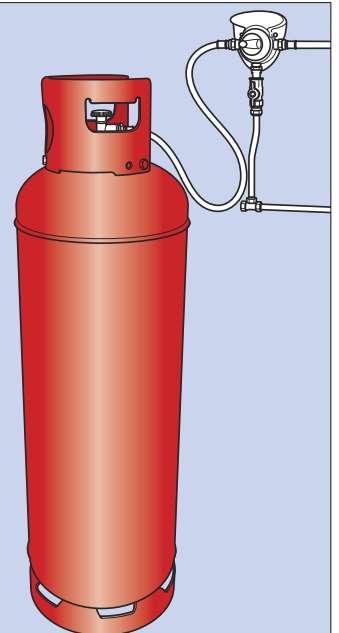

LPG MANAGEMENT (CONTINUED)

Gas Bottle Connection

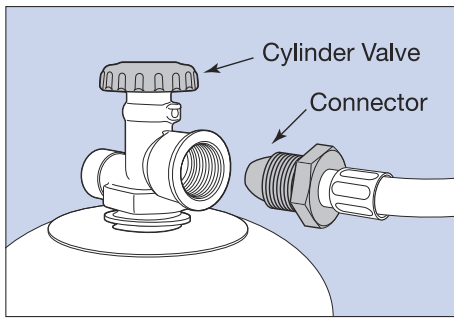

The connector fitted to the gas supply hose has a **left hand male thread** which fits directly to the cylinder's valve.

To fit the connector, firstly check that the

cylinder's valve is closed (turn clockwise) then remove the plastic plug from the cylinder valve (left hand thread, turn clockwise to release).

Most connectors have a brass mating face but you may have a connector with a rubber mating face.

Check the contact surface of the connector for scratches and general damage. The surface must be clean, dry and undamaged. Insert the connector into the cylinder valve and turn anticlockwise.

Use the spanner provided to firmly tighten the connection.

Changing a Cylinder


Close the cylinder's valve (turn clockwise). Close the main gas valve, positioned below the Automatic Changeover Valve.

Using the spanner provided, undo the connection by turning clockwise, then replace the valve's plastic plug. Release the safety chain and remove the cylinder.

Position the replacement cylinder and replace the safety chain.

Connect the new cylinder and check for leaks before opening all supply valves.

Gas Valves



There is a gas valve for each LPG fuelled item, one for the water heater and one for the generator. Each valve is clearly marked and positioned within the generator bay. The valve is open when its lever is in line with the pipe and closed when at 90 degrees to it.


Setup

Connect both cylinders to their respective hoses as described above. Slowly open both cylinder valves.

Turn the Automatic Changeover Valve's dial so that its arrow is pointing to one of the cylinders, the arrow will show white. When this cylinder is empty, the arrow will show red and the Automatic Changeover Valve will draw from the second cylinder.

A red arrow shows an empty cylinder which should be changed. A changeover can be performed whilst the second cylinder is being used. Simply turn the Automatic Changeover Valve so its arrow is pointing to the second cylinder (this will show white), then change the cylinder as described above.

Make sure that you open the new cylinder's valve immediately after connection ready to take over from the second cylinder when it becomes empty.

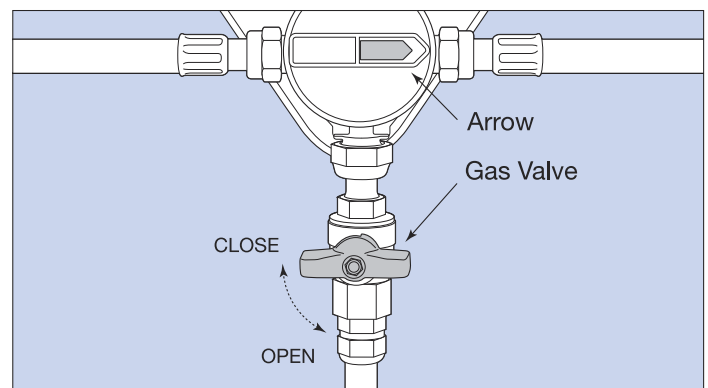

Automatic Changeover Valve

The unit's LPG system allows for two cylinders to be connected at one time.

Both cylinders are connected to an Automatic Changeover Valve which will automatically select one of the cylinders if the other is empty.

The valve has a large dial with an arrow which will show red if the cylinder is empty or white if full.

Checking for Leaks

Leaking LPG gas can be detected by smell. If a leak is found, turn off all cylinders at their valves and disconnect the equipment, then contact Advanté on 01268 280500 for advice between the hours of 8.00am and 5.00pm.

Do not use the unit until an Advanté qualified Gas Safe Engineer has attended.


GAS LEAKS

If you suspect a leak, tell everyone in the work area and make sure no one operates any electrical switches, smokes or creates any sparks etc.


If a large amount of gas has escaped, evacuate the area and contact the emergency services.

If both bottles have been allowed to go empty, carry out task 1 on page 8, 'Resetting The System'. This will allow the heating to come back on.

SPECIFICATION

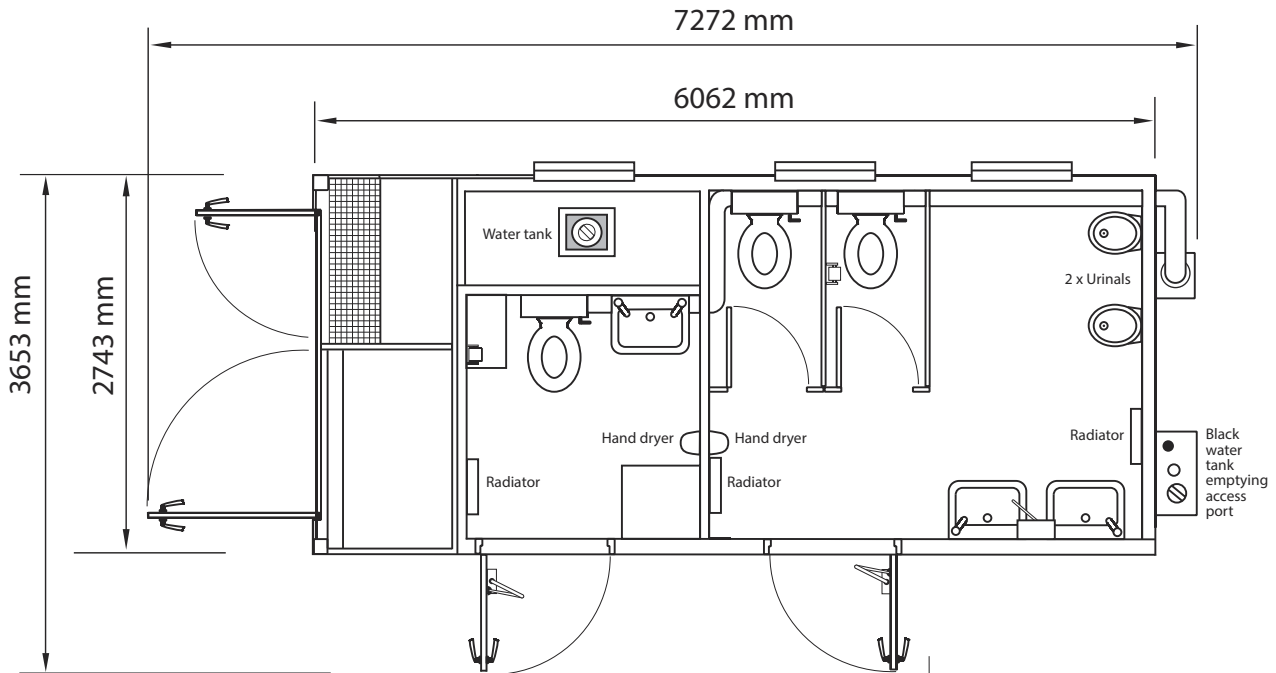



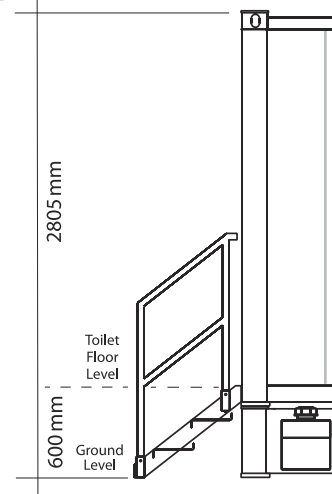







Stair Assembly



Unit Size	6.06m x 2.7m (20ft x 9ft)
Height (levelling legs closed)	2.8m (9ft)
Weight	6780kg
Water Capacity	1000ltr water tank / no drinking containers
LPG	Max storage 4 x 47kg cylinders
Rate of Energy Conversion	135 grams of LPG per kW/H (average)
Generator	5.8 kVA LPG fuelled (0.8 power factor)
Water Heater	LPG fuelled Oasis heater
Additional Equipment	Fire extinguisher
Toilets	Flushing toilets & urinals

CLIENT RESPONSIBILITIES, T&C

Terms of Hire	Advanté Terms & Conditions, as per your quote. No other terms will be accepted without prior written agreement from Advanté confirmed by a letter signed by a Director of the Company. Note: The unit's principal purpose is accommodation, it is therefore classed as an item of non-mechanical plant.
Plant Use	Please ensure that each area is used for its intended purpose only, as indicated in layout plans!
Generator	The client is responsible as per the Advanté Terms & Conditions and manufacturer's recommendations for checking the engine oil level daily.
Unit Operation	The hire rate includes an allowance of 35 generator hours per week in order for the unit to operate automatically as designed. Any hours used beyond this will be charged as extra at our current rate.
LPG	The client is responsible for changing the bottles as required, space is provided for the storage of up to two additional bottles if required.
Levelling	The unit as described elsewhere will be levelled upon delivery, and the client is responsible for maintaining the unit in a level position at all times. Failure to do so could result in engine damage, which is chargeable to the client under the contract.
Waste	Only normal toilet waste must be put in the toilet. Any contamination of the waste could result in additional charges for the client.
Damage	In line with the Advanté Terms & Conditions, damage and shortages are charged to the client.
Water Refills	These are the client's responsibility.
Clean Air Space	Always ensure there is a minimum of 600mm clear space between the air inlet and outlet for the generator and any wall or other obstruction.









COSHH Risk Assessment No: 001			
Product Name: Calor Gas Propane			
Company name: Advanté			
Describe the activity or work process. <i>(Inc. how long/ how often this is carried out and quantity substance used)</i>	Fuelling Oasis Units		
Location of process being carried out?	Client locations as per hire		
Identify the persons at risk:	Advante Employees <input checked="" type="checkbox"/>	Client Employees <input checked="" type="checkbox"/>	Public <input type="checkbox"/>
Name the substance involved in the process and its manufacturer. <i>(A copy of a current safety data sheet is attached to this assessment)</i>	Calor Propane		
Classification (state the category of danger)			
 <input type="checkbox"/> Toxic/danger	 <input type="checkbox"/> Danger to environment	 <input type="checkbox"/> Oxidiser	
 <input checked="" type="checkbox"/> Warning	 <input type="checkbox"/> Corrosive	 <input type="checkbox"/> Explosive	
 <input type="checkbox"/> Long-term health hazard	 <input checked="" type="checkbox"/> Flammable	 <input checked="" type="checkbox"/> Compressed gas	
Hazard Type			
<input checked="" type="checkbox"/> Gas	<input type="checkbox"/> Vapour	<input type="checkbox"/> Mist	<input type="checkbox"/> Fume
<input type="checkbox"/> Dust	<input type="checkbox"/> Liquid	<input type="checkbox"/> Solid	<input type="checkbox"/> Other (State)
Route of Exposure			
<input checked="" type="checkbox"/> Inhalation	<input type="checkbox"/> Skin	<input type="checkbox"/> Eyes	<input type="checkbox"/> Ingestion
<input type="checkbox"/> Other	(State)		
Workplace Exposure Limits (WELs) please indicate n/a where not applicable			
Long-term exposure level (8hrTWA): 1000mg		Short-term exposure level (15 mins): 1250mg	
State the Risks to Health from Identified Hazards			
EC Classification: No Known Behaviour for Carcinogenicity, Mutagenicity and Teratogenicity			
Control Measures:			
<p>Only use in well-ventilated areas. Avoid naked flames. Avoid inhalation of vapours and when changing cylinders. When using do not eat, drink or smoke. Avoid prolonged or repeated contact with skin. Select gloves tested to a relevant standard (EN374). Personal hygiene is a key element of effective hand care. Gloves must only be worn on clean hands. After using gloves, hands should be washed and dried thoroughly. Wear safety glasses or full-face shield if splashes are likely to occur.</p>			
Safety Phrases:			

COSHH

S2 Keep out of the reach of children
 S36/37 Wear suitable protective clothing and gloves
 S61 Avoid release to the environment. Refer to special instructions / safety data sheets

Is health surveillance or monitoring required? Yes No

Personal Protective Equipment (state type and standard)

 <input type="checkbox"/> Dust mask		 <input type="checkbox"/> Visor	
 <input type="checkbox"/> Respirator		 <input type="checkbox"/> Goggles	
 <input checked="" type="checkbox"/> Gloves	EN 374 – protection against chemicals & micro-organisms	 <input type="checkbox"/> Overalls	
 <input type="checkbox"/> Footwear		 <input type="checkbox"/> Other	

First Aid Measures

Inhalation: Remove the affected person to fresh air. If breathing but unconscious place in recovery position. If breathing has stopped apply artificial respiration. If heartbeat absent give cardiac massage. Monitor breathing and pulse. Obtain medical assistance immediately.
Skin: When using high-pressure equipment, injection of product under the skin can occur. If high-pressure injuries occur, the casualty should be sent immediately to hospital. Do not wait for symptoms to develop.
Eyes: Flush the eye with copious quantities of water. If irritation persists refer for medical attention.
Ingestion: DO NOT INDUCE VOMITING. Protect airway if vomiting begins. Give nothing by mouth. If breathing but unconscious, place in recovery position. If breathing has stopped, apply artificial respiration. OBTAIN MEDICAL ATTENTION IMMEDIATELY.

Storage

Storage: In ambient temps. This product must never be stored in areas other than those allocated specifically for the storage of gas – ventilated gas locker and connect following the instructions provided with the Oasis unit.

Disposal of Substances & Contaminated Containers

Hazardous Waste Skip Return to Depot Return to Supplier Other
 (If Other Please State):
Please refer to gas exchange

Is exposure adequately controlled? Yes No









Risk Rating Following Control Measures

High Medium Low

Assessed By: RMc Date: June 2022











COSH H Risk Assessment No: 002			
Product Name: Elsan 12% Toilet Additive			
Company name: Advanté			
Describe the activity or work process. <i>(Inc. how long/ how often this is carried out and quantity substance used)</i>	Used as toilet additive in the preparation of Oasis units and added following toilet servicing conducted by Advanté contractors		
Location of process being carried out?	Client locations as per hire		
Identify the persons at risk:	Advanté Employees <input checked="" type="checkbox"/>	Client Employees <input checked="" type="checkbox"/>	Public <input type="checkbox"/>
Name the substance involved in the process and its manufacturer. <i>(A copy of a current safety data sheet is attached to this assessment)</i>	Elsan 12% Toilet Additive		
Classification (state the category of danger)			
 <input type="checkbox"/> Toxic/danger	 <input type="checkbox"/> Danger to environment	 <input type="checkbox"/> Oxidiser	
 <input checked="" type="checkbox"/> Warning	 <input type="checkbox"/> Corrosive	 <input type="checkbox"/> Explosive	
 <input checked="" type="checkbox"/> Long-term health hazard	 <input type="checkbox"/> Flammable	 <input type="checkbox"/> Compressed gas	
Hazard Type			
<input type="checkbox"/> Gas	<input type="checkbox"/> Vapour	<input type="checkbox"/> Mist	<input type="checkbox"/> Fume
<input type="checkbox"/> Dust	<input checked="" type="checkbox"/> Liquid	<input type="checkbox"/> Solid	<input type="checkbox"/> Other (State)
Route of Exposure			
<input type="checkbox"/> Inhalation	<input checked="" type="checkbox"/> Skin	<input checked="" type="checkbox"/> Eyes	<input checked="" type="checkbox"/> Ingestion
<input type="checkbox"/> Other (State)			
Workplace Exposure Limits (WELs) please indicate n/a where not applicable			
Long-term exposure level (8hrTWA): Not Assigned		Short-term exposure level (15 mins): Not Assigned	
State the Risks to Health from Identified Hazards			
May be harmful if ingested in quantity May cause eye irritation Skin – irritation and dermatitis may result from prolonged contact Do not breathe vapour			
Control Measures:			
Only use as directed into toilet bowl Avoid inhalation of vapours when applying to toilet When using do not eat, drink or smoke. Avoid prolonged or repeated contact with skin and eyes. Select gloves tested to a relevant standard (EN374). Personal hygiene is a key element of effective hand care. Gloves must only be worn on clean hands. After using gloves, hands should be washed and dried thoroughly. Wear safety glasses or full-face shield if splashes are likely to occur. Safety Phrases:			

COSHH









S2 Keep out of the reach of children S36/37 Wear suitable protective clothing and gloves S61 Avoid release to the environment. Refer to special instructions / safety data sheets			
Is health surveillance or monitoring required? Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>			
Personal Protective Equipment <i>(state type and standard)</i>			
 <input type="checkbox"/> Dust mask		 <input type="checkbox"/> Visor	
 <input type="checkbox"/> Respirator		 <input checked="" type="checkbox"/> Goggles	
 <input checked="" type="checkbox"/> Gloves	EN 374 – protection against chemicals & micro-organisms	 <input type="checkbox"/> Overalls	
 <input type="checkbox"/> Footwear		 <input type="checkbox"/> Other	
First Aid Measures			
<p>Inhalation: Remove the affected person to fresh air. If breathing but unconscious place in recovery position. If breathing has stopped apply artificial respiration. If heartbeat absent give cardiac massage. Monitor breathing and pulse. Obtain medical assistance immediately.</p> <p>Skin: When using high-pressure equipment, injection of product under the skin can occur. If high-pressure injuries occur, the casualty should be sent immediately to hospital. Do not wait for symptoms to develop.</p> <p>Eyes: Flush the eye with copious quantities of water. If irritation persists refer for medical attention.</p> <p>Ingestion: DO NOT INDUCE VOMITING. Protect airway if vomiting begins. Give nothing by mouth. If breathing but unconscious, place in recovery position. If breathing has stopped, apply artificial respiration. OBTAIN MEDICAL ATTENTION IMMEDIATELY.</p>			
Storage			
<p>Storage: Elsan Toilet Additive is entered into the toilet system by Advanté during unit preparation – additional treatments will be made by Toilet Servicers when completing Toilet Service</p>			
Disposal of Substances & Contaminated Containers			
Hazardous Waste <input type="checkbox"/> Skip <input checked="" type="checkbox"/> Return to Depot <input checked="" type="checkbox"/> Return to Supplier <input type="checkbox"/> Other <input type="checkbox"/>			
(If Other Please State):			

Is exposure adequately controlled?	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
Risk Rating Following Control Measures	
High <input type="checkbox"/>	Medium <input type="checkbox"/> Low <input checked="" type="checkbox"/>

Assessed By: RMc	Date: June 2022
------------------	-----------------

COSHH Risk Assessment No: 003			
Product Name: JCB Anti-Freeze			
Company name: Advanté			
Describe the activity or work process. <i>(Inc. how long/ how often this is carried out and quantity substance used)</i>	Used as anti-freeze within the sealed cooling system of Oasis generators and should not be an exposure risk to users of the unit unless cooling system leakage occurs – in this instance antifreeze will have a 50% dilution with water. Level adjustment is undertaken by Advanté Service Engineers		
Location of process being carried out?	Client locations as per hire		
Identify the persons at risk:	Advanté Employees <input checked="" type="checkbox"/>	Client Employees <input checked="" type="checkbox"/>	Public <input type="checkbox"/>
Name the substance involved in the process and its manufacturer. <i>(A copy of a current safety data sheet is attached to this assessment)</i>	JCB Anti Freeze		
Classification (state the category of danger)			
 <input type="checkbox"/> Toxic/danger	 <input type="checkbox"/> Danger to environment	 <input type="checkbox"/> Oxidiser	
 <input checked="" type="checkbox"/> Warning	 <input type="checkbox"/> Corrosive	 <input type="checkbox"/> Explosive	
 <input checked="" type="checkbox"/> Long-term health hazard	 <input type="checkbox"/> Flammable	 <input type="checkbox"/> Compressed gas	
Hazard Type			
<input type="checkbox"/> Gas	<input type="checkbox"/> Vapour	<input type="checkbox"/> Mist	<input type="checkbox"/> Fume
<input type="checkbox"/> Dust	<input checked="" type="checkbox"/> Liquid	<input type="checkbox"/> Solid	<input type="checkbox"/> Other (State)
Route of Exposure			
<input type="checkbox"/> Inhalation	<input checked="" type="checkbox"/> Skin	<input checked="" type="checkbox"/> Eyes	<input checked="" type="checkbox"/> Ingestion
<input type="checkbox"/> Other	(State)		
Workplace Exposure Limits (WELs) please indicate n/a where not applicable			
Long-term exposure level (8hrTWA): 10 mg/m3(Sk) – non diluted		Short-term exposure level (15 mins): 104 mg/m3(Sk) – non diluted	
State the Risks to Health from Identified Hazards			
Harmful if swallowed Classification Xn; R22 This chemical can be hazardous when inhaled and/or touched			
Control Measures:			
Provide adequate ventilation including Hand protection should be worn to prevent exposure to skin Goggles should be worn to prevent contact with eyes Wash contaminated clothing before re-use			
Safety Phrases:			

COSHH









S2 Keep out of the reach of children S13 keep away from food, drink and animal feed S24/25 Avoid contact with skin and eyes S46 If swallowed seek medical advice immediately S56 Dispose of this material and its container to hazardous waste point S61 Avoid release to the environment. Refer to special instructions / safety data sheets			
Is health surveillance or monitoring required? Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>			
Personal Protective Equipment (state type and standard)			
 <input type="checkbox"/> Dust mask		 <input type="checkbox"/> Visor	
 <input type="checkbox"/> Respirator		 <input checked="" type="checkbox"/> Goggles	
 <input checked="" type="checkbox"/> Gloves	EN 374 – protection against chemicals & micro-organisms	 <input type="checkbox"/> Overalls	
 <input type="checkbox"/> Footwear		 <input type="checkbox"/> Other	
First Aid Measures			
Inhalation: Move injured person to fresh air and keep person calm under observation. If necessary seek medical advice and bring these instructions Skin: Remove affected person from source of contamination. Remove contaminated clothing and flush with plenty of water until pain disappears. If discomfort persists seek medical attention Eyes: Immediately flush with plenty of water for up to 15 minutes. Remove any contact lenses and open eyes wide apart. Get medical attention if any discomfort continues Ingestion: DO NOT INDUCE VOMITING. Protect airway if vomiting begins. Give nothing by mouth. If breathing but unconscious, place in recovery position. If breathing has stopped, apply artificial respiration. OBTAIN MEDICAL ATTENTION IMMEDIATELY.			
Storage			
Storage: Anti-freeze is stored within the cooling system of the generator and should not have a direct access to the users of the Oasis unit. Exposure is only expected when attending to the levels of the cooling system when undertaken by an Advanté Service Engineer who follows our specific RAMS for generator servicing			
Disposal of Substances & Contaminated Containers			
Hazardous Waste <input type="checkbox"/> Skip <input type="checkbox"/> Return to Depot <input checked="" type="checkbox"/> Return to Supplier <input type="checkbox"/> Other <input type="checkbox"/> (If Other Please State):			

Is exposure adequately controlled?	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
Risk Rating Following Control Measures	
High <input type="checkbox"/>	Medium <input type="checkbox"/>
Low <input checked="" type="checkbox"/>	

Assessed By: RMc	Date: June 2022
------------------	-----------------

COSH H Risk Assessment No: 004			
Product Name: Lead Acid Battery			
Company name: Advanté			
Describe the activity or work process. <i>(Inc. how long/ how often this is carried out and quantity substance used)</i>	This product is used for the top up of batteries before they are installed into the Oasis unit. No exposure to this substance is possible unless batteries are damaged or have been moved causing the contents to spill. All battery maintenance should be undertaken by an Advanté Service Engineer		
Location of process being carried out?	Client locations as per hire		
Identify the persons at risk:	Advanté Employees <input checked="" type="checkbox"/>	Client Employees <input type="checkbox"/>	Public <input type="checkbox"/>
Name the substance involved in the process and its manufacturer. <i>(A copy of a current safety data sheet is attached to this assessment)</i>	Electrolyte (Lead Acid Battery)		
Classification (state the category of danger)			
 <input type="checkbox"/> Toxic/danger	 <input type="checkbox"/> Danger to environment	 <input type="checkbox"/> Oxidiser	
 <input checked="" type="checkbox"/> Warning	 <input checked="" type="checkbox"/> Corrosive	 <input type="checkbox"/> Explosive	
 <input checked="" type="checkbox"/> Long-term health hazard	 <input type="checkbox"/> Flammable	 <input type="checkbox"/> Compressed gas	
Hazard Type			
<input type="checkbox"/> Gas	<input type="checkbox"/> Vapour	<input type="checkbox"/> Mist	<input type="checkbox"/> Fume
<input type="checkbox"/> Dust	<input checked="" type="checkbox"/> Liquid	<input type="checkbox"/> Solid	<input type="checkbox"/> Other (State)
Route of Exposure			
<input checked="" type="checkbox"/> Inhalation	<input checked="" type="checkbox"/> Skin	<input checked="" type="checkbox"/> Eyes	<input type="checkbox"/> Ingestion
<input type="checkbox"/> Other		(State)	
Workplace Exposure Limits (WELs) please indicate n/a where not applicable			
Long-term exposure level (8hrTWA): 1 mg/m ³ (Sk) – non diluted		Short-term exposure level (15 mins): 2 mg/m ³ (Sk) – non diluted	
State the Risks to Health from Identified Hazards			
Eye Corrosion – Corrosive Skin Corrosion – Corrosive Contact may cause irritation or severe burns. Irritating to eyes, respiratory system and skin Ingestion – Respiratory tract irritation and possible long term effects			
Control Measures:			
To be used in well ventilated areas Respiratory protection note required for normal use Eye protection should always be worn when using this substance Gloves should always be used when handling this substance If spilt on clothing wash before re-use Acid resistant apron recommended when adding water or electrolyte to batteries			









COSHH

Safety Phrases: S2 Keep out of the reach of children S13 keep away from food, drink and animal feed S24/25 Avoid contact with skin and eyes S46 If swallowed seek medical advice immediately S56 Dispose of this material and its container to hazardous waste point S61 Avoid release to the environment. Refer to special instructions / safety data sheets			
Is health surveillance or monitoring required? Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>			
Personal Protective Equipment (state type and standard)			
 <input type="checkbox"/> Dust mask		 <input type="checkbox"/> Visor	
 <input type="checkbox"/> Respirator		 <input checked="" type="checkbox"/> Goggles	
 <input checked="" type="checkbox"/> Gloves	EN 374 – protection against chemicals & micro-organisms	 <input checked="" type="checkbox"/> Overalls	
 <input type="checkbox"/> Footwear		 <input type="checkbox"/> Other	
First Aid Measures			
<p>Inhalation: If inhaled move to fresh air, if breathing difficulties develop seek medical attention</p> <p>Skin: Flush affected area(s) with large amounts of water using deluge emergency shower for up to 15 minutes. Remove contaminated clothing and wash before re-use</p> <p>Eyes: Immediately flush with plenty of water for up to 15 minutes. Remove any contact lenses and open eyes wide apart. Get medical attention if any discomfort continues</p> <p>Ingestion: DO NOT INDUCE VOMITING. Protect airway if vomiting begins. Give large quantities of water. If breathing but unconscious, place in recovery position. If breathing has stopped, apply artificial respiration. OBTAIN MEDICAL ATTENTION IMMEDIATELY.</p>			
Storage			
<p>Storage: Batteries are installed in units and should not need to be accessed by site operatives only Advante Service Engineers. If damaged or have moved as result of cabin movement contact Advante.</p>			
Disposal of Substances & Contaminated Containers			
<p>Hazardous Waste <input type="checkbox"/> Skip <input type="checkbox"/> Return to Depot <input checked="" type="checkbox"/> Return to Supplier <input type="checkbox"/> Other <input type="checkbox"/></p> <p>(If Other Please State):</p>			

Is exposure adequately controlled?	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	
Risk Rating Following Control Measures		
High <input type="checkbox"/>	Medium <input type="checkbox"/>	Low <input checked="" type="checkbox"/>











Assessed By: RMc	Date: June 2022
------------------	-----------------

COSHH Risk Assessment No: 005			
Product Name: 10w-30 Engine Oil			
Company name: Advanté			
Describe the activity or work process. <i>(Inc. how long/ how often this is carried out and quantity substance used)</i>	Used for lubrication of Oasis unit generators and provided in 1ltr containers for topping up engines should oil warning light show low oil levels within generator – spouted jug provided with unit for this task for oil to be poured into jug to prevent spillage onto generator outer casing that might cause smoke when heated or hot		
Location of process being carried out?	Client locations as per hire		
Identify the persons at risk:	Advante Employees <input checked="" type="checkbox"/>	Client Employees <input checked="" type="checkbox"/>	Public <input type="checkbox"/>
Name the substance involved in the process and its manufacturer. <i>(A copy of a current safety data sheet is attached to this assessment)</i>	10x-30 engine oil		
Classification (state the category of danger)			
 <input type="checkbox"/> Toxic/danger	 <input checked="" type="checkbox"/> Danger to environment	 <input type="checkbox"/> Oxidiser	
 <input checked="" type="checkbox"/> Warning	 <input type="checkbox"/> Corrosive	 <input type="checkbox"/> Explosive	
 <input type="checkbox"/> Long-term health hazard	 <input checked="" type="checkbox"/> Flammable	 <input type="checkbox"/> Compressed gas	
Hazard Type			
<input type="checkbox"/> Gas	<input type="checkbox"/> Vapour	<input type="checkbox"/> Mist	<input type="checkbox"/> Fume
<input type="checkbox"/> Dust	<input checked="" type="checkbox"/> Liquid	<input type="checkbox"/> Solid	<input type="checkbox"/> Other (State)
Route of Exposure			
<input type="checkbox"/> Inhalation	<input type="checkbox"/> Skin	<input checked="" type="checkbox"/> Eyes	<input checked="" type="checkbox"/> Ingestion
<input type="checkbox"/> Other (State)			
Workplace Exposure Limits (WELs) please indicate n/a where not applicable			
Long-term exposure level (8hrTWA): 5mg/m3		Short-term exposure level (15 mins): 10mg/m3	
State the Risks to Health from Identified Hazards			
No Significant Hazard No other known hazards			
Control Measures:			
When using do not eat, drink or smoke Ensure adequate ventilation of the working area If spilled on hot surfaces do not inhale fumes Wear chemical protective clothing Do not ingest If spilled use absorbent material to wipe up to and prevent entrance to water supplies or drainage systems			









Safety Phrases: S2 Keep out of the reach of children S36/37 Wear suitable protective clothing and gloves S61 Avoid release to the environment. Refer to special instructions / safety data sheets			
Is health surveillance or monitoring required? Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>			
Personal Protective Equipment (state type and standard)			
 <input type="checkbox"/> Dust mask		 <input type="checkbox"/> Visor	
 <input type="checkbox"/> Respirator		 <input checked="" type="checkbox"/> Goggles	
 <input checked="" type="checkbox"/> Gloves	EN 374 – protection against chemicals & micro-organisms	 <input type="checkbox"/> Overalls	
 <input type="checkbox"/> Footwear		 <input type="checkbox"/> Other	
First Aid Measures			
Inhalation: Do not breath fumes if burnt or spilled onto hot surfaces Skin: Irritating to skin, wash off immediately with plenty of soap and water, remove contaminated clothing. Seek medical attention if irritation or symptoms persist Eyes: Irritating to eyes, rinse immediately with plenty of water for 15mins. Seek medical attention if irritation or symptoms persist Ingestion: DO NOT INDUCE VOMITING. Ingestion may cause nausea and vomiting. Seek medical attention if symptoms continue			
Storage			
Storage: The 1ltr container should be stored in the generator compartment in dry and well-ventilated areas. Keep container tightly closed and always in correctly labelled			
Disposal of Substances & Contaminated Containers			
Hazardous Waste <input type="checkbox"/> Skip <input type="checkbox"/> Return to Depot <input checked="" type="checkbox"/> Return to Supplier <input type="checkbox"/> Other <input type="checkbox"/> (If Other Please State):			

Is exposure adequately controlled?	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
Risk Rating Following Control Measures	
High <input type="checkbox"/>	Medium <input type="checkbox"/> Low <input checked="" type="checkbox"/>

Assessed By: RMc	Date: June 2022
------------------	-----------------

COSHH Risk Assessment No: 006			
Product Name: Hand Soap Bars			
Company name: Advanté			
Describe the activity or work process. <i>(Inc. how long/ how often this is carried out and quantity substance used)</i>	The hand soap bars are for clients using the Oasis welfare units for hand and facial washing. They are not antiseptic soap bars and are for external use only.		
Location of process being carried out?	Client locations as per hire		
Identify the persons at risk:	Advante Employees <input type="checkbox"/>	Client Employees <input checked="" type="checkbox"/>	Public <input type="checkbox"/>
Name the substance involved in the process and its manufacturer. <i>(A copy of a current safety data sheet is attached to this assessment)</i>	General hand soap bars		
Classification (state the category of danger)			
 <input type="checkbox"/> Toxic/danger	 <input type="checkbox"/> Danger to environment	 <input type="checkbox"/> Oxidiser	
 <input type="checkbox"/> Warning	 <input type="checkbox"/> Corrosive	 <input type="checkbox"/> Explosive	
 <input type="checkbox"/> Long-term health hazard	 <input type="checkbox"/> Flammable	 <input type="checkbox"/> Compressed gas	
Hazard Type			
<input type="checkbox"/> Gas	<input type="checkbox"/> Vapour	<input type="checkbox"/> Mist	<input type="checkbox"/> Fume
<input type="checkbox"/> Dust	<input type="checkbox"/> Liquid	<input type="checkbox"/> Solid	<input type="checkbox"/> Other (State)
Route of Exposure			
<input type="checkbox"/> Inhalation	<input type="checkbox"/> Skin	<input checked="" type="checkbox"/> Eyes	<input checked="" type="checkbox"/> Ingestion
<input type="checkbox"/> Other	(State)		
Workplace Exposure Limits (WELs) please indicate n/a where not applicable			
Long-term exposure level (8hrTWA): Not Listed		Short-term exposure level (15 mins): Not Listed	
State the Risks to Health from Identified Hazards			
No Significant Hazard No other known hazards			
Control Measures:			
Avoid contact with eyes Do not ingest Safety Phrases:			
Is health surveillance or monitoring required?			
		Yes <input type="checkbox"/>	No <input checked="" type="checkbox"/>

COSH

Personal Protective Equipment <i>(state type and standard)</i>			
 <input type="checkbox"/> Dust mask		 <input type="checkbox"/> Visor	
 <input type="checkbox"/> Respirator		 <input type="checkbox"/> Goggles	
 <input type="checkbox"/> Gloves	EN 374 – protection against chemicals & micro-organisms	 <input type="checkbox"/> Overalls	
 <input type="checkbox"/> Footwear		 <input type="checkbox"/> Other	
First Aid Measures			
Inhalation: Not applicable Skin: Not applicable Eyes: Irritating to eyes, rinse immediately with plenty of water for 15mins Ingestion: DO NOT INDUCE VOMITING. Ingestion may cause nausea and vomiting. Seek medical attention if symptoms continue			
Storage			
Storage: This product should be stored in the dry and contact with water and damp should be avoided			
Disposal of Substances & Contaminated Containers			
Hazardous Waste <input type="checkbox"/> Skip <input type="checkbox"/> Return to Depot <input checked="" type="checkbox"/> Return to Supplier <input type="checkbox"/> Other <input type="checkbox"/> (If Other Please State):			

Is exposure adequately controlled?	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
Risk Rating Following Control Measures	
High <input type="checkbox"/>	Medium <input type="checkbox"/>
Low <input checked="" type="checkbox"/>	

Assessed By: RMc	Date: June 2022
------------------	-----------------

For your peace of mind



Head Office

Advanté Ltd, 10/11 Argent Court, Sylvan Way, Southfields Business Park, Basildon, Essex SS15 6TH

T: 01268 280500 E: sales@advante.co.uk W: www.advante.co.uk